



# Flotec®

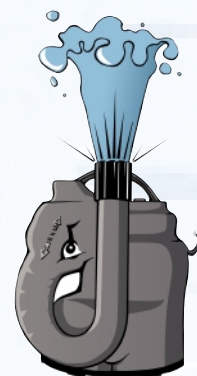

## ComPac

Submersible pumps  
for clear water.  
With integrated  
automatic  
floating switch.

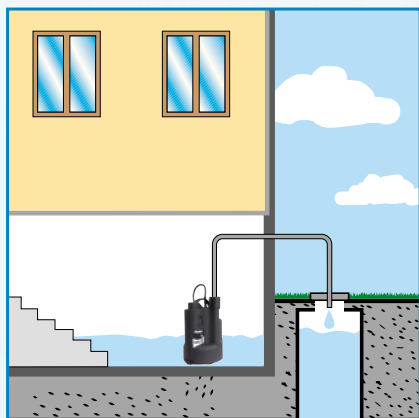

CE







Integrated automatic floating switch.  
Draining level: 3 mm with manual mode.

**MAN.**

**AUTO.**

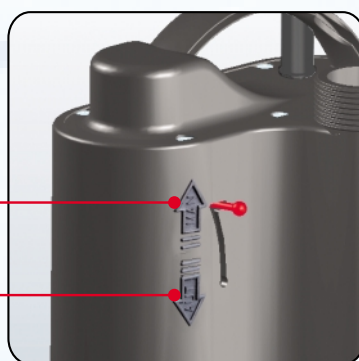


Automatic and manual mode.

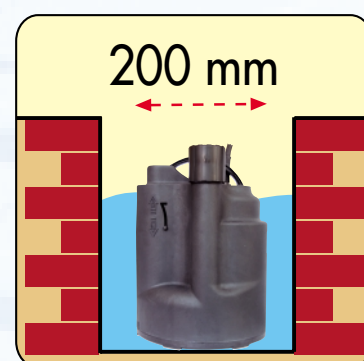

Ideal for limited space.

The **ComPac Flotec** pumps for clear water are designed to drain domestic water containing particles with a maximum diameter of 5 mm, empty and dry flooded rooms, draw water from wells, basins or cisterns.

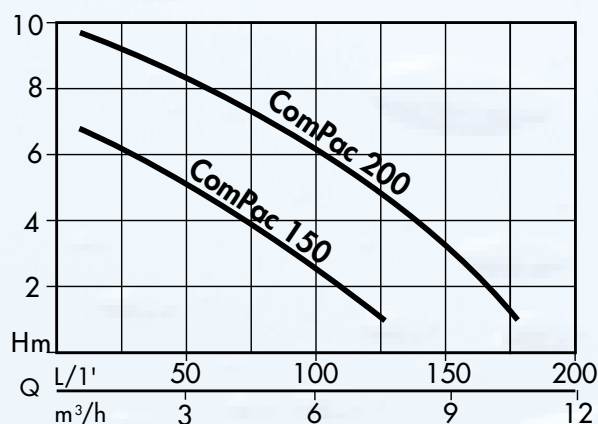

### Typical features

- Asynchronous single-phase motor with built-in thermal relay.
- Motor shaft with reinforcing ceramic inserts to guarantee a longer life and allow the pump to be used in continuous mode.
- NBR 70 rubber lip.
- Class F motor winding.
- IP 68 Protection Class.
- AISI 416 STAINLESS steel motor shaft.
- Single-impeller hydraulic system in NORYL.
- Colour lithographed package.
- Suitable for clear water with a maximum temperature of 40° C.

MODEL	ComPac 150z	ComPac 200
<b>Code</b>	N1080030	N1080040
<b>Absorbed power</b>	300 W	650 W
<b>Head/Max. pressure</b>	7 m / 0,7 bar	10 m / 1,0 bar
<b>Max. flow rate</b>	8500 l/h	11500 l/h
<b>Pump body</b>	Polypropylene	Polypropylene
<b>Minimum draining level</b>	3 mm (manual)	3 mm (manual)
<b>Start /stop levelz</b>	140 mm/30 mm (manual)	140 mm/30 mm (manual)
<b>Max. size of impurities</b>	5 mm	5 mm
<b>Pump outlet</b>	1" 1/4 M	1" 1/4 M
<b>Power cablez</b>	10 m H05 RN-F	10 m H05 RN-F
<b>Accessories suppliedz</b>	Adjustable connector for hoses ø 19, 25 et 32 mm Check valve	Adjustable connector for hoses ø 19, 25 et 32 mm Check valve