



Japanese Technology since 1912

EVMS - Vertical Multistage Pumps

Product Catalogue





Japanese Technology since 1912

www.ebara-europe.com

Built like a Katana

A Katana is a Japanese product, it's made with a traditional know-how started in 300 a.C.. Katana is manufactured with care and precision of details. Only years of experience can give the necessary capacity to build a masterpiece.

This is what we do with our pumps. Our 100 years of Japanese experience in pumps manufacturing are the base to project and realize pumps with high quality performance, reliability and cutting-edge mechanical parts.

We look forward not forgetting the past.

EBARA new vertical multistage pumps named "EVMS" are manufactured with the highest standards of quality, to achieve reliable operating performance by means of strict technical evaluation criteria and control programs that involve the whole manufacturing process.


We listen to the market. Our design is unique. EVMS can offer the exceptional values through the cutting-edge solutions that best suits your needs.



Precision, Quality, Cutting-Edge



- **Pump Type**
EBARA vertical multistage in line pumps EVMS
- **Model range**
1, 3, 5, 10, 15, 20 m³/h flow sizes
- **Maximum operating range (Pressure/Liquid temperature)**
16 bar or 25 bar / - 30 to + 140 °C
- **Material version (bottom casing)**
EVMS (AISI 304), EVMSL (AISI 316), EVMSG (Cast iron)
- **Pipe connections**
Round flange / Round loose flange / Oval flange / Victaulic® / Clamp
- **Motor**
High Efficiency motor IE3 over 0.75 kW, 50 Hz / 60Hz,
Single phase / Three phase
PTC as standard for the above 1.5 kW

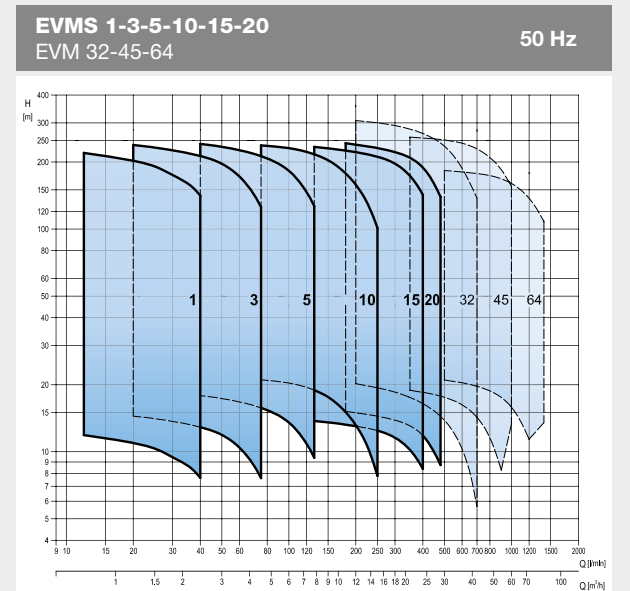

Main product features



- Innovative hydraulic solutions**
- **Commercial motors** can be fitted to all of the pump models without any modifications thanks to low pump axial thrust load
 - **Long life of the motor bearing**
 - **High pump efficiency** classified in MEI > 0.7 as the most efficient models
 - **Patent Application n.VI2014A000271**



- Energy saving**
- High efficiency IE3 motor starting from 0.75 kW complied with the EuP 2005/32/EC and ErP 2009/125/EC directives
 - The **VFD (Variable frequency drive)** and the **commercial sensor** can be directly mounted on EVMS to **maintain physical constant operations** such as pumping pressure depending on the conditions of use

- 3 **Piping connection options**
- The various pipe connections are available depending on the application requirements
 - The external dimensions can be adjusted to the replacement of the existing pump in the wide majority

Material	Round flange DIN/ANSI	Round Loose flange DIN/ANSI	Oval FLange	Plug-In connection (Victaulic®, Clamp)
AISI304/ AISI316				
Cast Iron				



- Shaft seal solutions**
- **Shaft seal material:**
 - B: Resin impregnated carbon graphite
 - Q: Sintered silicon carbide
 - Qg: Silicon carbide with carbon graphite
 - Carbon or graphite inclusions with silicon carbide can be used as **dry lubricant to reduce friction.**
 - It's conforming to EN12756 (ex DIN 24960)



- Easy maintenance**
- The **cartridge shaft seal** enables the **plug in replacement** of the shaft seal without disassembling the motor bracket
 - The **spacer coupling** allows easy maintenance without having to remove heavy motors over 5.5 kW.

- 6 **Smart plug solutions**



Air ventilation plug




Water filling & sensor plug



Commercial sensor fitting



Measurements for suction and discharge pressure / drain

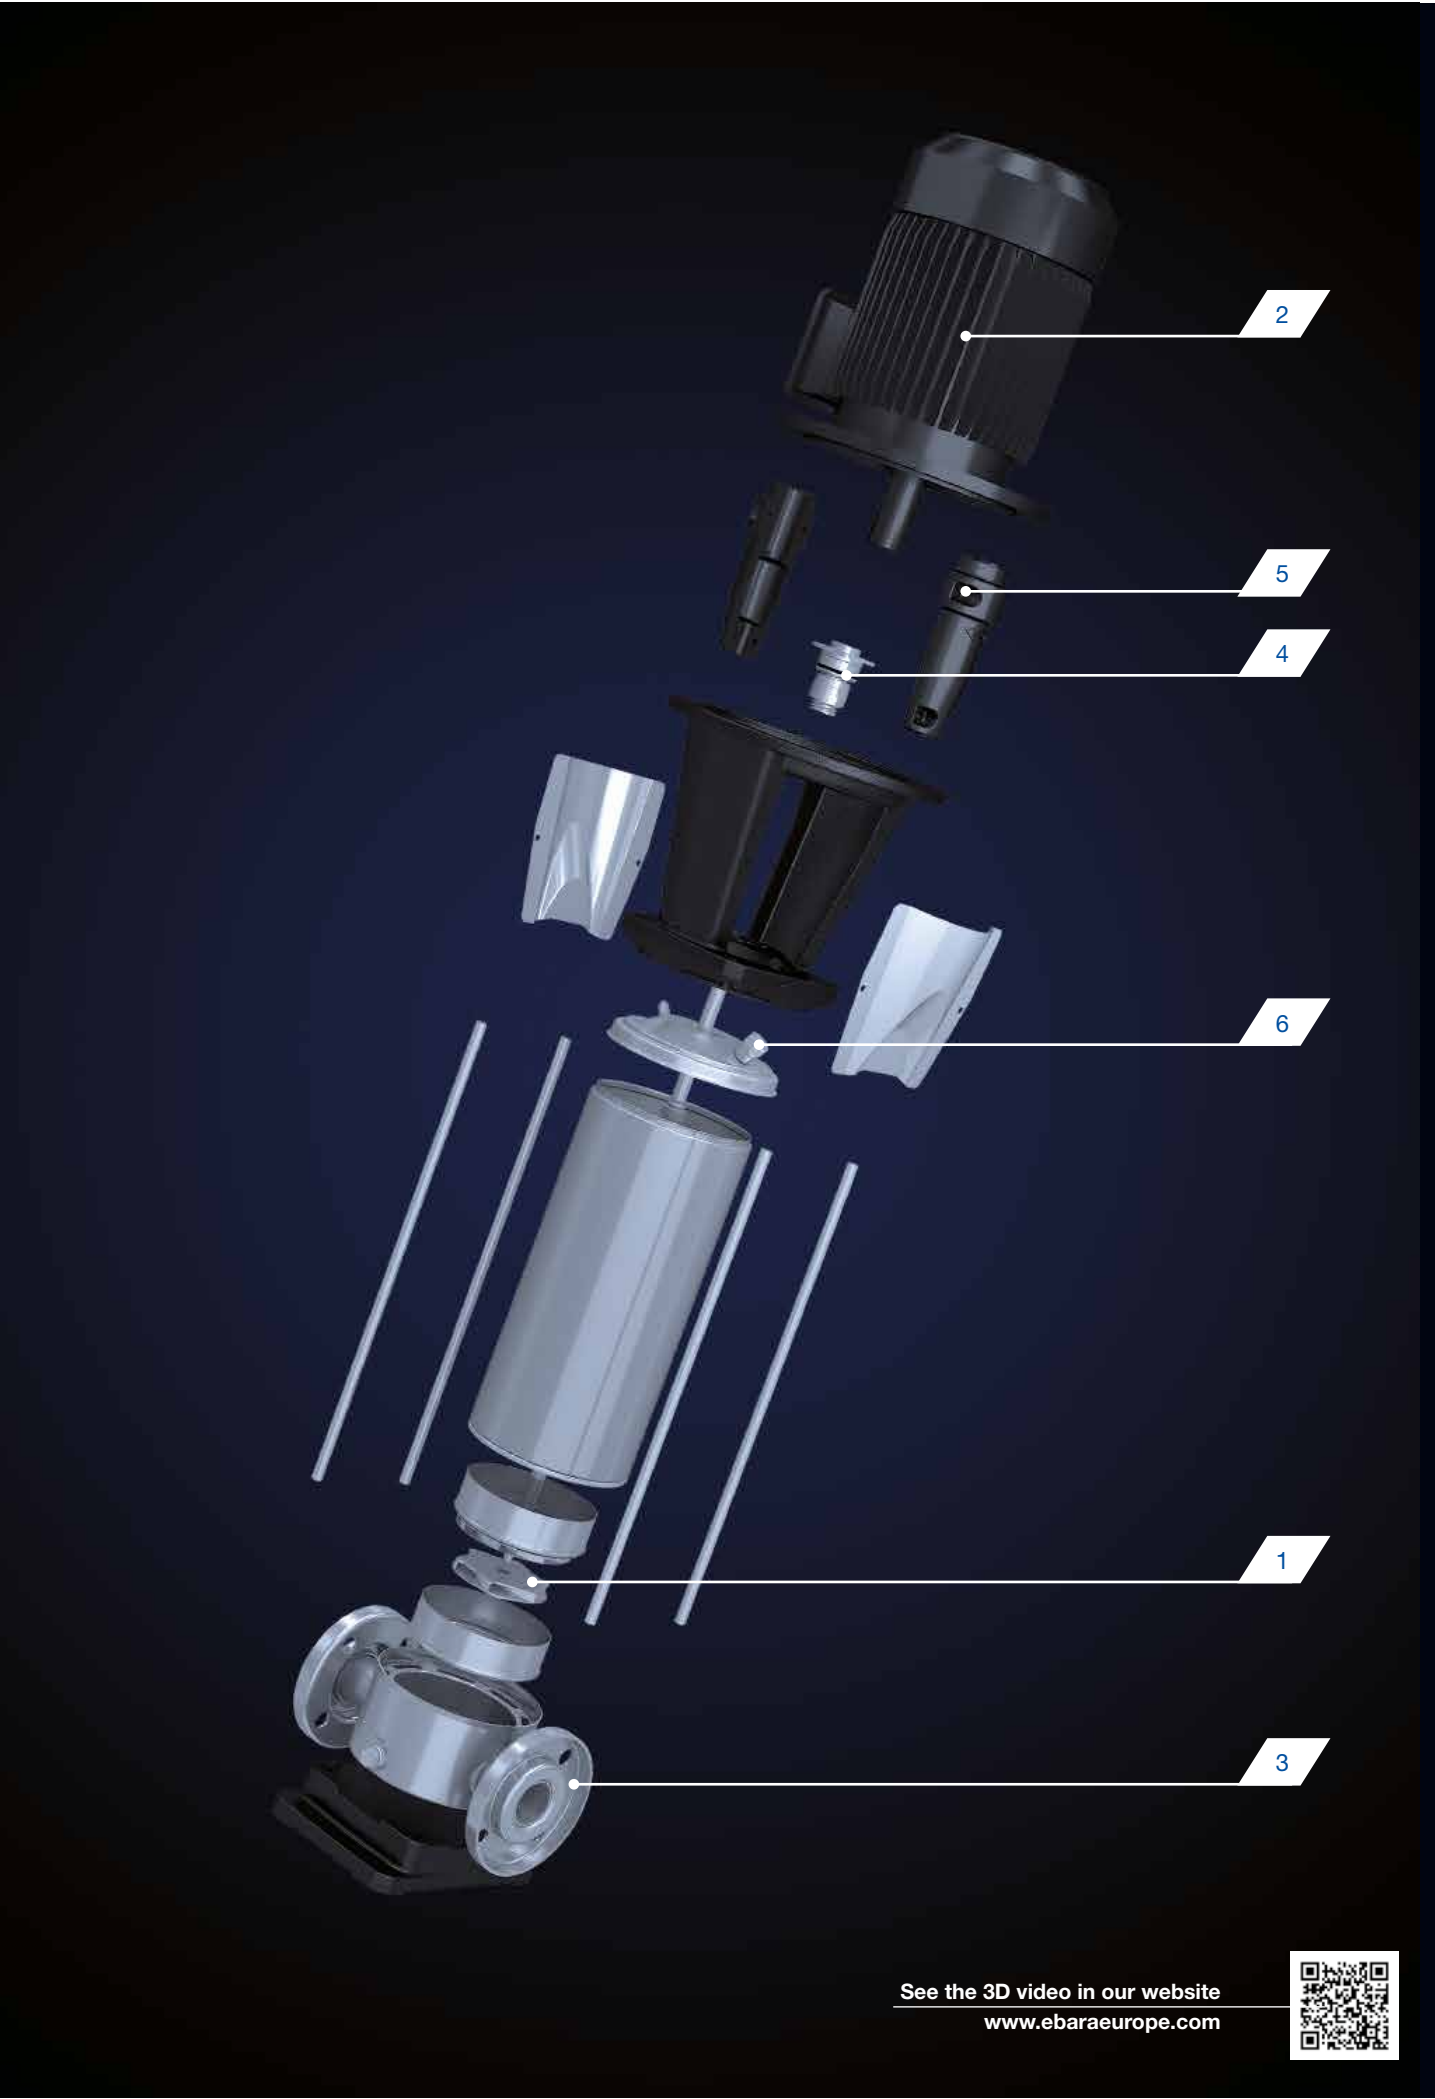

See the 3D video in our website
www.ebara.eu





Reliability is made by numbers

1
Million

Cycles of the endurance test*

2
Times


Higher test criteria than nominal operating conditions*

3
Times

Much less axial thrust load than common pumps

* for main components

Solve axial thrust load

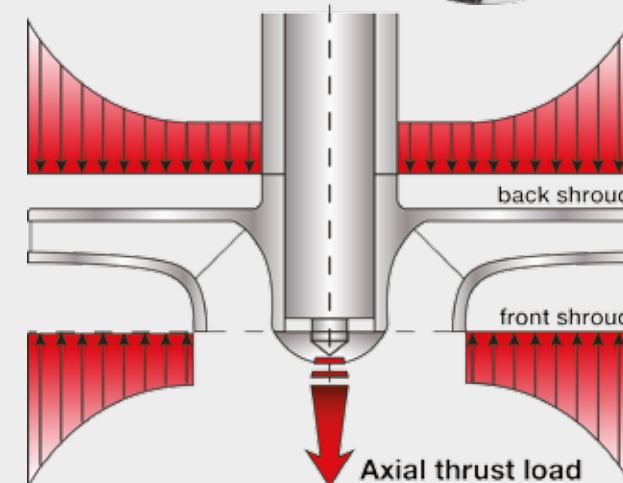

The pump axial thrust load is caused by the unbalance of the static pressure between a front shroud and a back shroud of an impeller. That always causes **the reduction of the bearing life of the motor.**

General methods to work with the axial thrust load are as below.

- Increasing the size of motor bearing or using enhanced motor bearings.
- Mounting additional ball bearings on the pump bracket. These measurements are historically known to cause complicated mechanical structures.

EBARA new designed impeller "Shurricane" can reduce the pump axial thrust load with high pump efficiency by means of the innovative hydraulic design method.

EVMS can accept the commercial motors without any modifications and improve the maintenance cycles of motor bearing.



**In harmony
with our
customers**

Fields of applications



INDUSTRY

- **Water treatment**
reverse osmosis
ultra-filtration
water purification
micro-filtration
softening, ionizing
and demineralising systems
swimming pools
separators
- **Boiler feeding**
steam systems
condensate systems
- **Wash and clean**
vehicle washing systems
industrial part washing
laundry systems
supply of liquids with acids and bases
supply of chemical liquids
- **Chilling**
handling of refrigerants for cooling
thermal control systems
industrial cooling
laser cooling
- **Machine tooling**
cooling lubricant supply for tooling machines
- **Pressure boosting**
pressure boosting for industrial use
- **Food & beverage**
food washing systems
bottle wash systems
- **Pharmaceutical industries**
- **Marine applications**
freshwater, deckwash, high fog and fire fighting on ships



BUILDING SERVICE

- **Pressure boosting**
pressure boosting for buildings
pressure boosting for high rise buildings/hotels
- **Sprinkler systems**
- **Fire fighting systems**
jockey pump
- **District heating**
- **Heat exchangers / fan heaters**
- **Air conditioning systems**
- **Heating systems**



WATER SUPPLY

- **Water treatment**
water treatment plants filtration
water treatment plants transfer
- **Pressure boosting**
transfer from water treatment plants (mains)
- **Irrigation**
golf course / sport fields irrigation
- **Agriculture**
sprinkler irrigation
drip irrigation

EBARA worldwide service points



please see the contact list on page 21.


**EVMS
DATA**



Performance Range

50Hz

EVMS 1-3-5-10-15-20
EVM 32-45-64

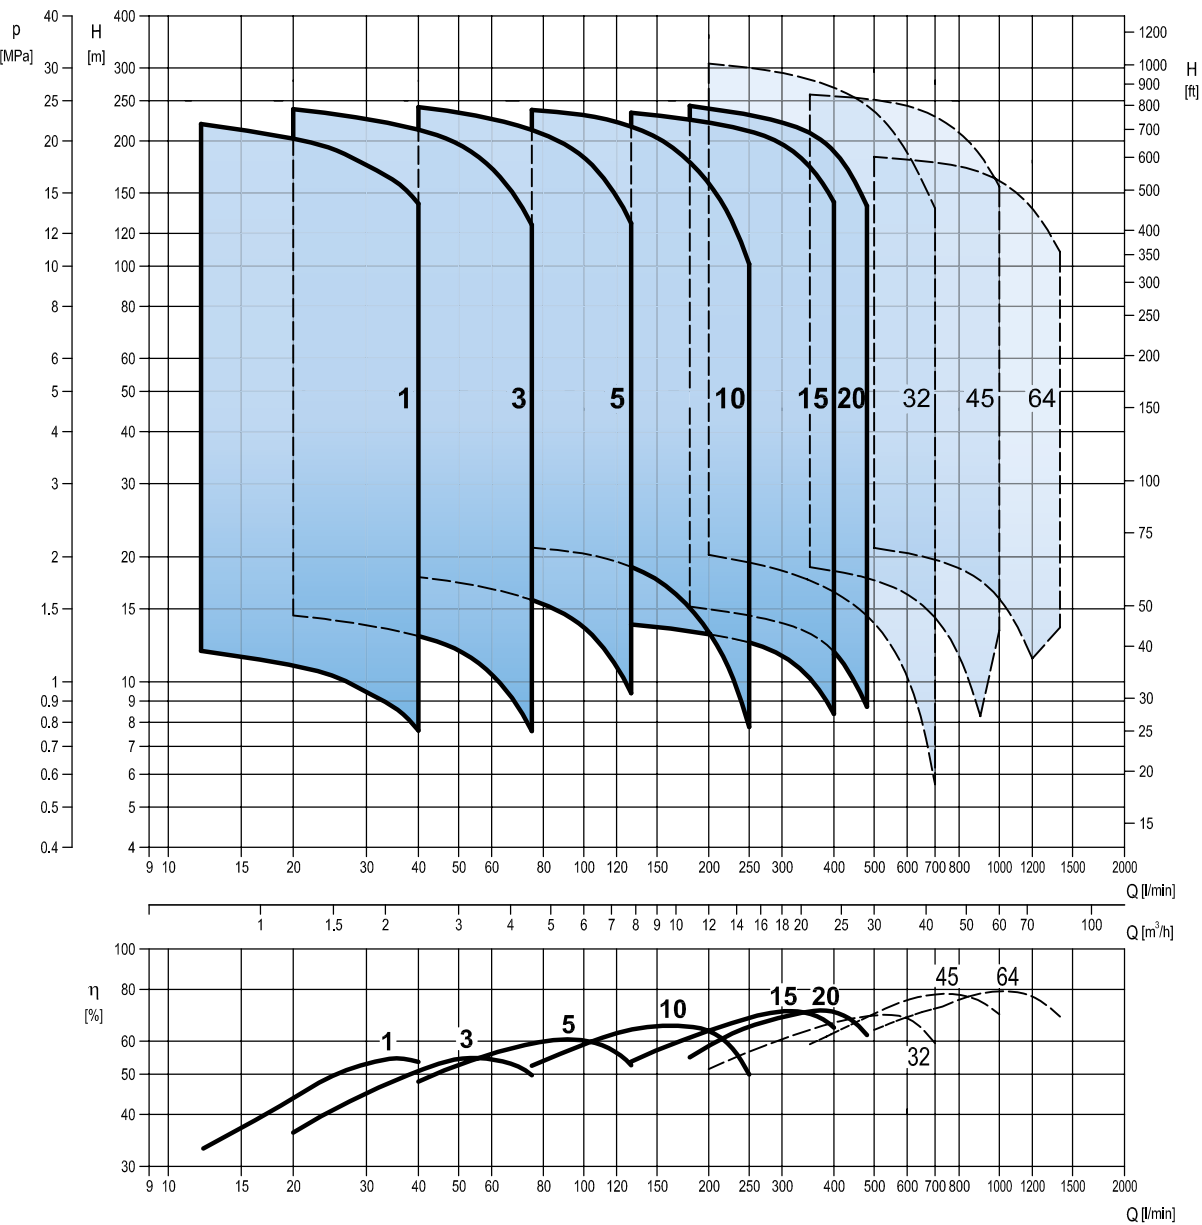


Minimum efficiency index (MEI)

Pump type	MEI
EVMS(.)1	> 0.70
EVMS(.)3	> 0.70
EVMS(.)5	> 0.70
EVMS(.)10	> 0.70
EVMS(.)15	> 0.70
EVMS(.)20	> 0.60

Performance Range


60Hz

EVMS 1-3-5-10-15-20
EVM 32-45-64

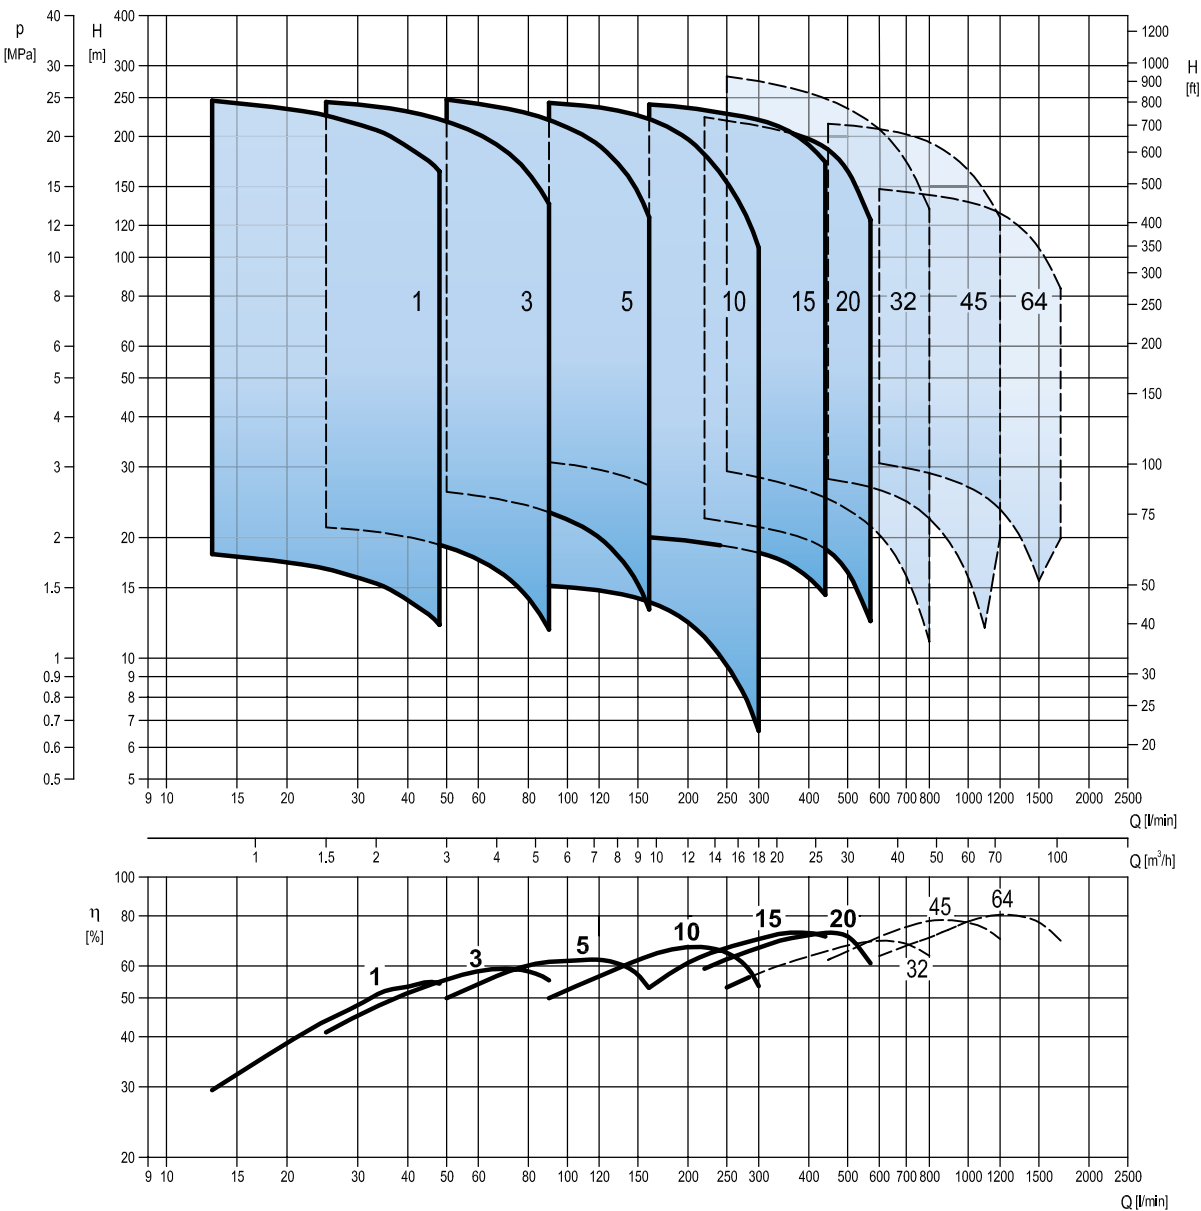

Sectional Drawing

EVMS 1-3-5-10-15-20

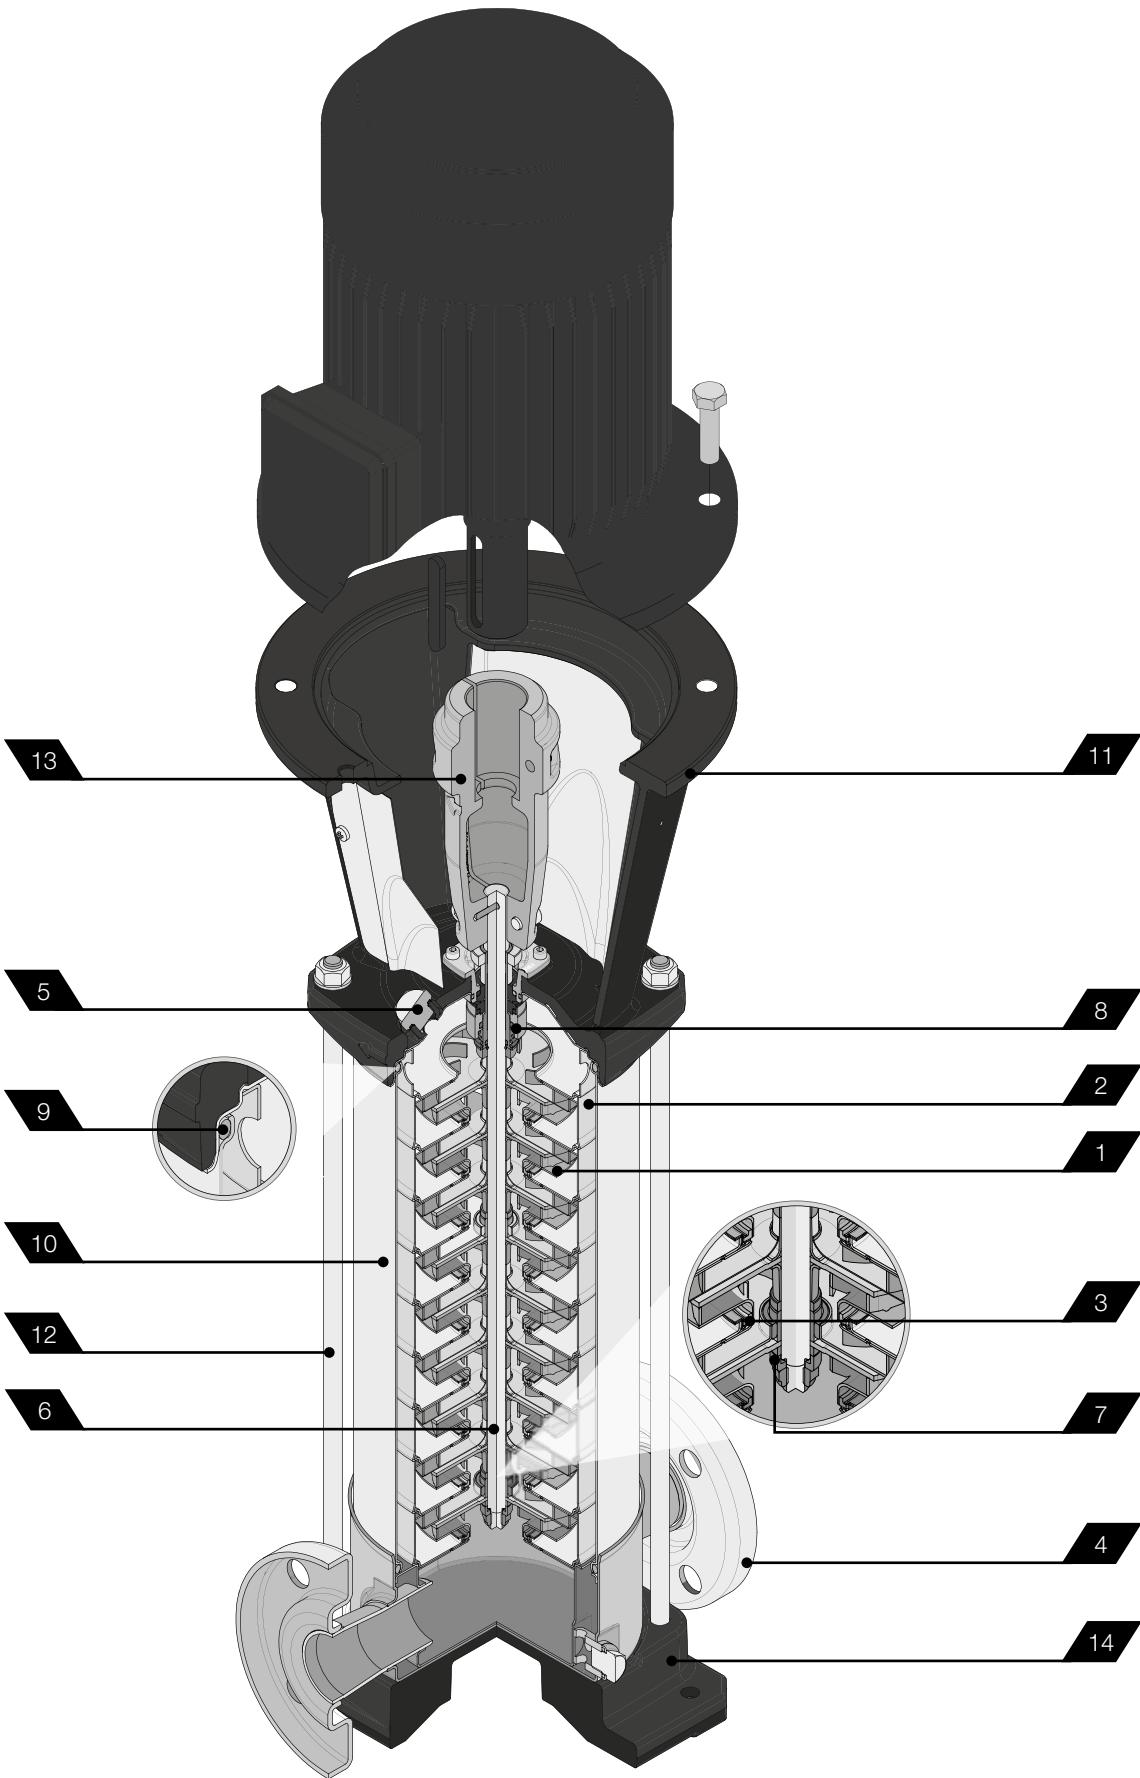

Product Specifications

EVMS 1-3-5-10-15-20

Pump

Version			EVMSG						EVMS						EVMSL					
Operating range	Nominal flow rate (m³/h)		1	3	5	10	15	20	1	3	5	10	15	20	1	3	5	10	15	20
	Maximum working pressure		1.6/2.5 MPa (16 bar/25 bar)																	
	Maximum liquid temperature range		-30° to 140°C																	
Key Components Materials	1. Impeller		EN 1.4301 (AISI 304)												EN 1.4401 (AISI 316)					
	2. Intermediate casing		EN 1.4301 (AISI 304)												EN 1.4401 (AISI 316)					
	3. Liner ring		EN 1.4301 (AISI 304) + PPS												EN 1.4401 (AISI 316) + PPS					
	4. Bottom casing		Cast Iron						EN 1.4301 (AISI 304)						EN 1.4401 (AISI 316)					
	5. Casing cover		EN 1.4301 (AISI 304)												EN 1.4401 (AISI 316)					
	6. Shaft	EN 1.4301 (AISI 304)	EVMSG / EVMS 1-3-10, EVMSG 5-15-20 (depend on models)																	
		EN 1.4404 (AISI 316L)	EVMSL 1-3-10, EVMSL 5-15-20 (depend on models)																	
		EN 1.4460 (AISI 329A)	EVMSG / EVMS / EVMSL 5-15-20 (depend on models)																	
	7. Shaft sleeve bearing		Tungsten carbide																	
	8. Shaft seal		Please see the shaft seal options on page 18.																	
	9. O ring	EPDM	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		FPM	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	10. Outer casing		EN 1.4301 (AISI 304)												EN 1.4404 (AISI 316L)					
	11. Motor bracket		Cast Iron																	
	12. Tie rod		Galvanized steel 6.8 strength class ISO 898/1																	
	13. Coupling		Die cast aluminium (up to 4 kW), Cast iron (from 5.5 kW)																	
14. Base		Cast iron						Die cast aluminium												
Pipe Connection	Oval flange	up to 16 bar	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Round flange	up to 16 bar	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	DIN/ANSI	from 16 bar to 25 bar	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Round loose flange	up to 16 bar							○	○	○	○	○	○	○	○	○	○	○	
	DIN	from 16 bar to 25 bar							○	○	○	○	○	○	○	○	○	○	○	
	Victaulic®	up to 25 bar							○	○	○	○	○	○	○	○	○	○	○	
Clamp		up to 25 bar							○	○	○	○	○	○	○	○	○	○	○	


Legend: ● Standard ○ Options

Motor

Power Source	Frequency	50 Hz		60 Hz	
	Phase	Single Phase		Three Phase	
	Rotation Speed	~ 2900 min ⁻¹		~ 3500 min ⁻¹	
	Power Rating	0.37 ÷ 2.2 kW	0.37 ÷ 18.5 kW	0.37 ÷ 18.5 kW	
		0.5 ÷ 3.0 HP	0.5 ÷ 25 HP	0.5 ÷ 25 HP	
	Voltage	230 ± 10%	230/400 ± 10% (up to 4kW) 400/690 ± 10% (above 5.5 kW)	220/380 ± 10% V (up to 4kW) 380/660 ± 10% V (above 5.5 kW)	265/460 ± 10% V (up to 4kW) 460 ± 10% V (above 5.5 kW)
Type	Type	Electric - TEFC		Electric - TEFC	
	Efficiency	from 0.37 to 2.2 kW	from 0.37 to 0.55 kW IE3 from 0.75 to 18.5 kW	from 0.37 kW to 0.55 kW IE3 from 0.75 to 18.5 kW	
	No° of poles	2		2	
	Protection Degree	IP 55		IP 55	
	Insulation Class	F (temperature rise class B)		F (temperature rise class B)	
	Thermal Protection	PTC as standard for the above 1.5 kW		PTC as standard for the above 1.5 kW	
Others	Casing Material	Aluminium		Aluminium	
	Flange Mount (IEC motor)	IM B14 (up to 4 kW) IM B5 (above 5.5 kW)		IM B14 (up to 4 kW) IM B5 (above 5.5 kW)	

Shaft seal data

EVMS 1-3-5-10-15-20

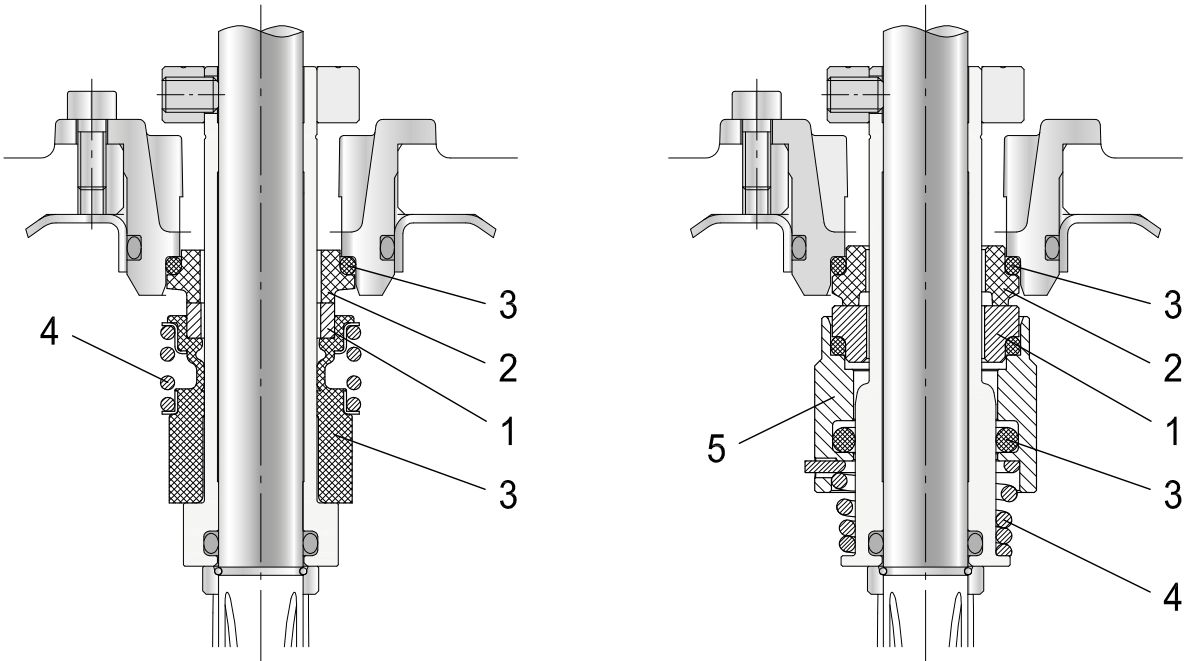

up to 16 bar

from 16 bar to 25 bar

Legend: ● Standard ○ Options () Type key

Pump model	Max operating pressure	Shaft seal type		Shaft seal material					Type key
		Unbalanced	Balanced	1 Rotating Part	2 Stationary Part	3 Elastomers	4 Spring	5 Collar	
up to 16 bar	- 30°C to + 120°C	●		SiC (Q ₁)	Carbon (B)	EPDM (E)	AISI316 (G)		Q ₁ BEG
	- 30°C to + 80°C	○		SiC (Q ₁)	Carbon (B)	FPM (V)	AISI316 (G)		Q ₁ BEG
	- 30°C to + 120°C	○		SiC with graphite (Q _g)	SiC (Q ₁)	EPDM (E)	AISI316 (G)		Q _g Q ₁ EG
	- 30°C to + 80°C	○		SiC with graphite (Q _g)	SiC (Q ₁)	FPM (V)	AISI316 (G)		Q _g Q ₁ VG
	- 30°C to + 140°C		○	SiC (Q ₁)	Carbon (B)	EPDM (E)	AISI316 (G)		HQ ₁ BEG
from 16 bar to 25 bar	- 30°C to + 140°C		●	SiC (Q ₁)	Carbon (B)	EPDM (E)	AISI316 (G)		HQ ₁ BEG
	- 30°C to + 80°C		○	SiC (Q ₁)	Carbon (B)	FPM (V)	AISI316 (G)		HQ ₁ BVG
	- 30°C to + 140°C		○	SiC with graphite (Q _g)	SiC (Q ₁)	EPDM (E)	AISI316 (G)		HQ _g Q ₁ EG
	- 30°C to + 80°C		○	SiC with graphite (Q _g)	SiC (Q ₁)	FPM (V)	AISI316 (G)		HQ _g Q ₁ VG

Pipe Connection data

EVMS 1-3-5-10-15-20

Oval Flange (N)		Maximum operating pressure	Dimensions	EVMS (AISI 304) EVMSL (AISI 316)		
				1/3/5	10	15/20
PN16			D	G1	G1½	G2
			L	160	200	200
			B1 / B2	100/180	130/215	130/215
			H	50	80	90
Oval Flange (N)		Maximum operating pressure	Dimensions	EVMSG (Cast Iron)		
				1/3/5	10	15/20
PN16			D	G1	G1½	G2
			L	160	200	200
			B1 / B2	100/180	130/215	130/215
			H	50	80	90
Round Flange (F)		Maximum operating pressure	Dimensions	EVMS (AISI 304) EVMSL (AISI 316)		
				1/3/5	10	15/20
PN25			D	DN25	DN40	DN50
			L	250	280	300
			B1 / B2	100/180	130/215	130/215
			H	75	80	90
Round Flange (F)		Maximum operating pressure	Dimensions	EVMSG (Cast Iron)		
				1/3/5	10	15/20
PN25			D	DN25	DN40	DN50
			L	250	280	300
			B1 / B2	100/180	130/215	130/215
			H	75	80	90
Round Loose Flange (LF)		Maximum operating pressure	Dimensions	EVMS (AISI 304) EVMSL (AISI 316)		
				1/3/5	10	15/20
PN25			D	DN25	DN40	DN50
			L	250	280	300
			B1 / B2	100/180	130/215	130/215
			H	75	80	90
Victaulic® (V)		Maximum operating pressure	Dimensions	EVMS (AISI 304) EVMSL (AISI 316)		
				1/3/5	10	15/20
PN25			D	DN32	DN50	DN50
			L	210	261	261
			B1 / B2	100/180	130/215	130/215
			H	50	80	90
Clamp (C)		Maximum operating pressure	Dimensions	EVMS (AISI 304) EVMSL (AISI 316)		
				1/3/5	10	15/20
PN25			D	DN32	DN50	DN50
			L	162	202	202
			B1 / B2	100/180	130/215	130/215
			H	50	80	90



Japanese Technology since 1912

www.ebara-europe.com



The raw materials used to produce this paper originate only from forests that are properly managed from social and economical point of view

