

1


2

3

4

5

6



View looking down on the tank.
Treat this diagram like a clockface.
DISCHARGE is set at 12 o'clock.
Indicate the relative position for INLETS
CABLE DUCT and VENT if required.


Fabrication Specifications				
ITEM	INDEX	DEPTH (mm)	DIA. (mm)	CLOCKFACE POSITION
Tank depth	A			
Tank Ø	B			
Inlet	C1		110	
Inlet	C2			
Inlet	C3			
Discharge	D		63	12
Cable duct			110	
Vent			110	

Kiosk (Single Door)		
Length (mm)	Width (mm)	Height (mm)
750	400	1250

Comments

Please Note - Inlet invert should be between 400 - 1015 mm.


Inlet seals and ducts can be supplied loose to be drilled and fitted on site

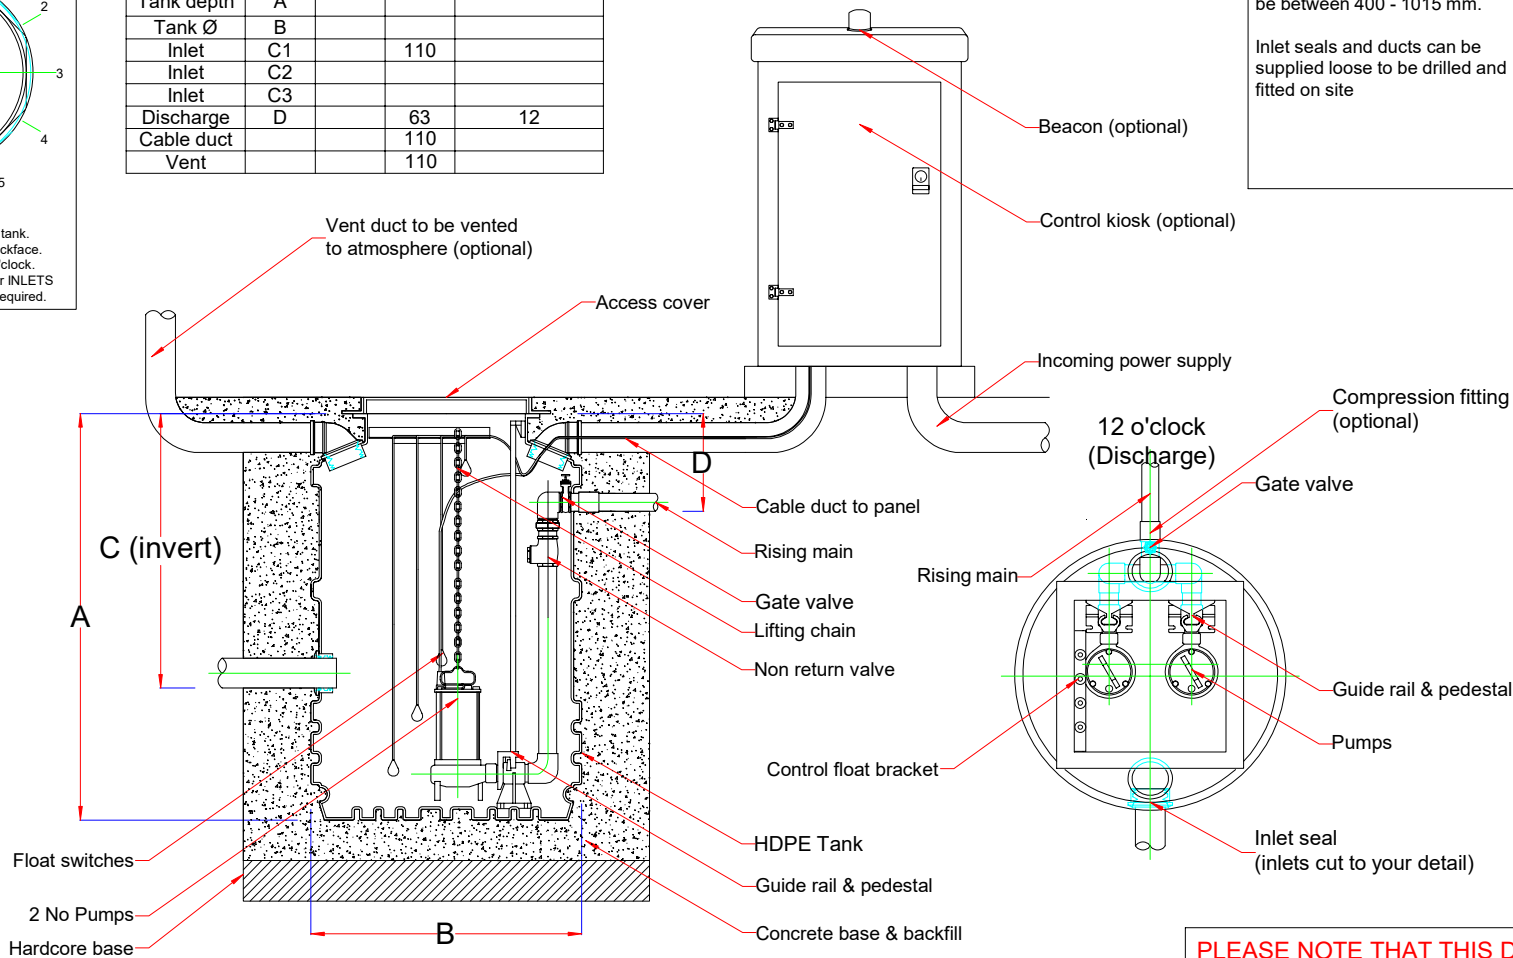

PLEASE NOTE THAT THIS DOCUMENT MUST BE READ IN CONJUNCTION WITH THE INSTALLATION & OPERATING GUIDELINES

REV	DETAIL	DATE	DRAWN	TITLE

CUSTOMER

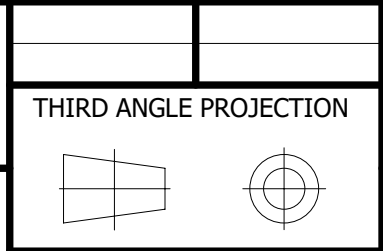

DRAWN
gf

SCALE
NOT TO SCALE

SHEET
1 of 1

TOLERANCE +/- 2%

REV 0