

Hydrofix Water Pressure Booster



Hydrofix water pressure booster is an automatic solution for both domestic and commercial premises with low water pressure or flow. The self-contained system is compact, silent, easy to install and has a type AB air gap to comply with water authority regulations. Water from the mains or private water supply is stored in the tank which also houses a submersible pump. A built in flow sensor prevents the pump from running dry and automatically re-sets once the water level recovers.

Advantages:

- Easy to install
- Pre-installed pump in the tank
- Compact dimensions
- Full automatic
- Noiseless
- Following EN1717 regulation & approved
- Up to 2 pumps can be installed
- Ergonomic design

Technical Characteristics:

- Multistage, full stainless steel pump AISI 304
- Variable speed drive with dry running protection
- Outlet overflow diam. 75mm
- Supplied with a 5 litre expansion tank
- Type AB air gap equipped with strainer following EN1717

Technical	
Max. flow	2 up to 6 m^3 /h
Max. pressure at zero- flow	2 up to 8 bar
Protection	IP68
Power (P2)	550 up to 1500 Watt
Power supply	230 Volt 50 Hz

Dimensions & Weight	
Width/Height/Depth	500/600/1500mm
Mains water connection	3/4" M (max
	701/min)
Connection after the	1" Man.
inverter	
Overflow	DN75
Weight without water	55 to 80 kg




How it works:

- **Hydrofix Auto** A built in pressure switch automatically starts and stops the pump when a tap or valve on the outlet is opened or closed.
- **Hydrofix Vario** Has a variable speed inverter drive. As demand increases or decreases the controller varies the speed of the pump accordingly to maintain a constant pressure.

Applications:

- Residential houses
- Apartments
- Factories
- Kitchens
- Farms

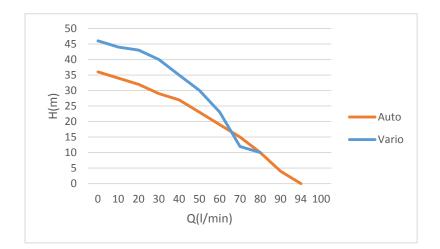



Whisper Pumps Leen Court Boughton Newark Nottinghamshire NG22 9ZD United Kingdom