

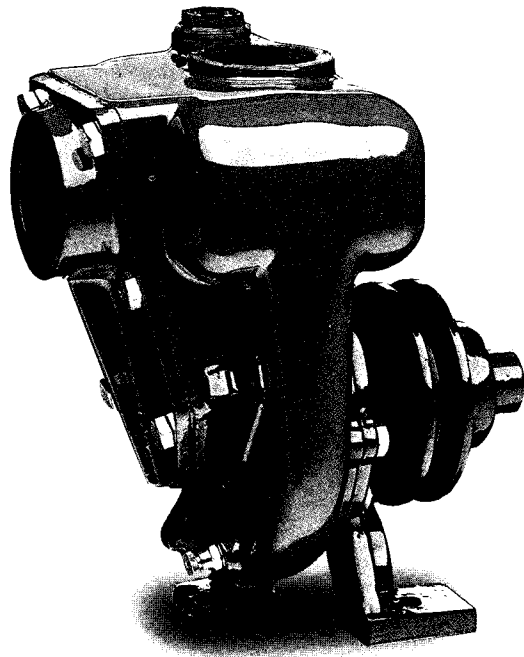


**Serie H**  
**H Series**

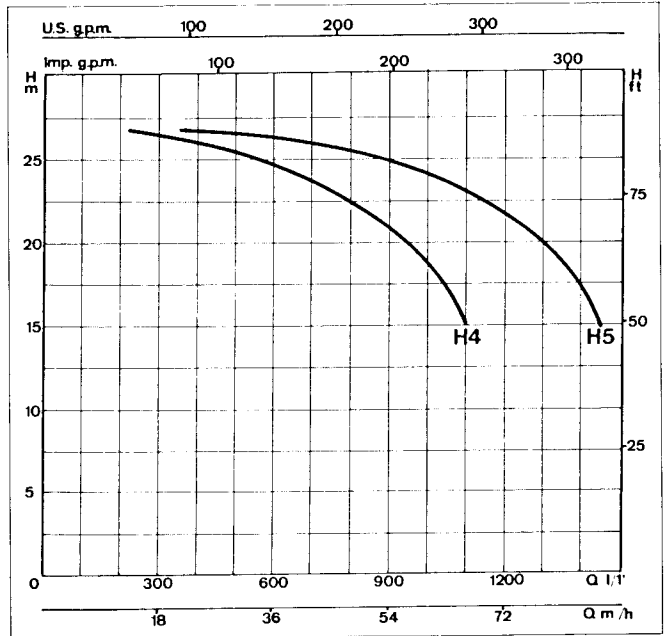

Curve di funzionamento a 3000 giri/1''

Operating curves at 3000 r.p.m.

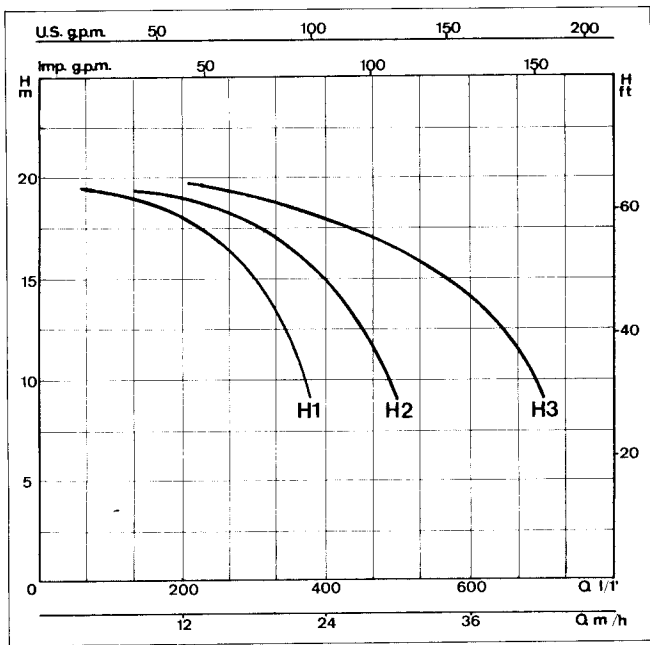

Caratteristiche di funzionamento a 3000 giri/1''

Operating data at 3000 r.p.m.

TIPO TYPE	HP	kW	Q	PORTATA - DELIVERY													POINTS	
																	DNa	DNm
				m³/h	1,5	3	6	9	12	18	24	36	48	60	72	84		
			l/min	25	50	100	159	200	300	400	600	800	1000	1200	1400			
H 1	1,5	1,1	PREVALENZA MANOMETRICA IN METRI CA TOTAL MANOMETRIC HEAD IN METERS	19	18,5	18	17,5	17	15								1''½	1''½
H 2	2	1,5			19	18,5	18	17,5	17	15							2''	2''
H 3	4	3				19	18,5	18	17,5	17	14						2''½	2''½
H 4	5,5	4						27	26,5	26	25	23	18				3''	3''
H 5	7,5	5,5							27	26,5	26	25,5	24	22	15		3''	3''