
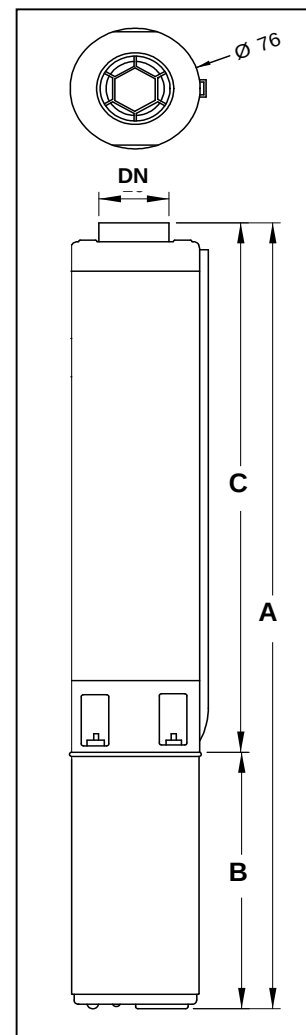


50 Hz - 2850 rpm

Tested according ISO 9906

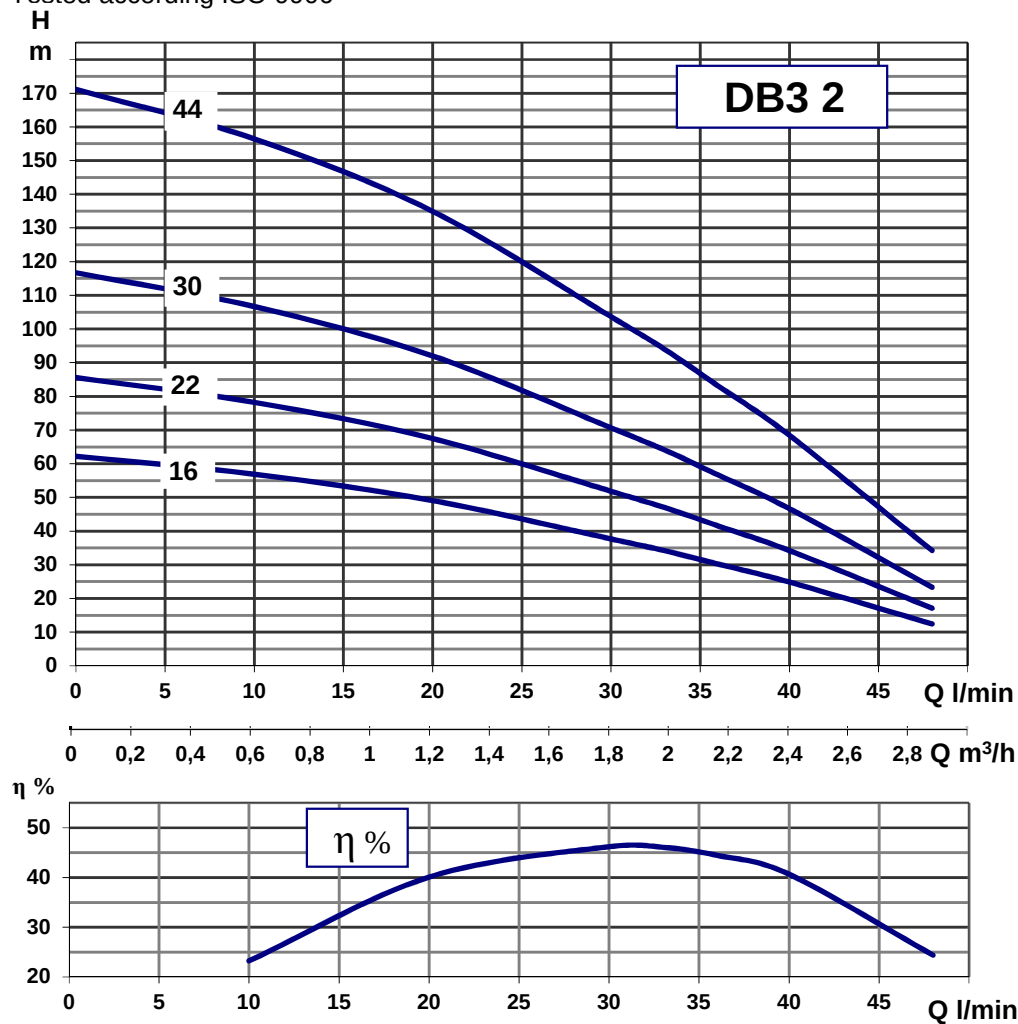

50 Hz - 2850 rpm

MODEL	50 Hz	MOTOR		CAPACITOR		Q - Flow								DIMENSIONS			
						m³/h	0	0,6	1,2	1,8	2	2,2	2,4				
		l/min	0	10	20	30	33	36	40	48	A	B	C	DN			
H - Manometric height (m)																	
BS3 2/16M	1~220/230	0,37	3,8	16	450									923	377	546 1" 1/4	
BS3 2/16T	3~220/230 3~380/415		3.5 2.0											923	377		
BS3 2/22M	1~220/230	0,55	4,5	20	450									1075	397	678 1" 1/4	
BS3 2/22T	3~220/230 3~380/415		3.7 2.1											1055	377		
BS3 2/30M	1~220/230	0,75	5,9	25	450									1270	416	854 1" 1/4	
BS3 2/30T	3~220/230 3~380/415		4.4 2.5											1251	397		
BS3 2/44T	3~220/230 3~380/415	1,1	5.6 3.2											1619	416	1203	1" 1/4