
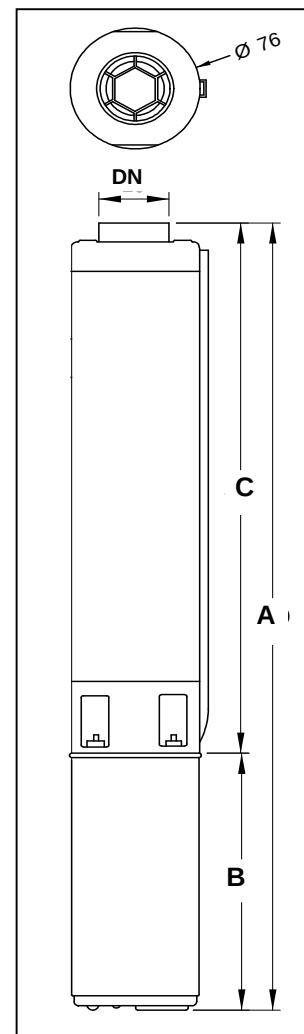


50 Hz - 2850 rpm

Tested according ISO 9906

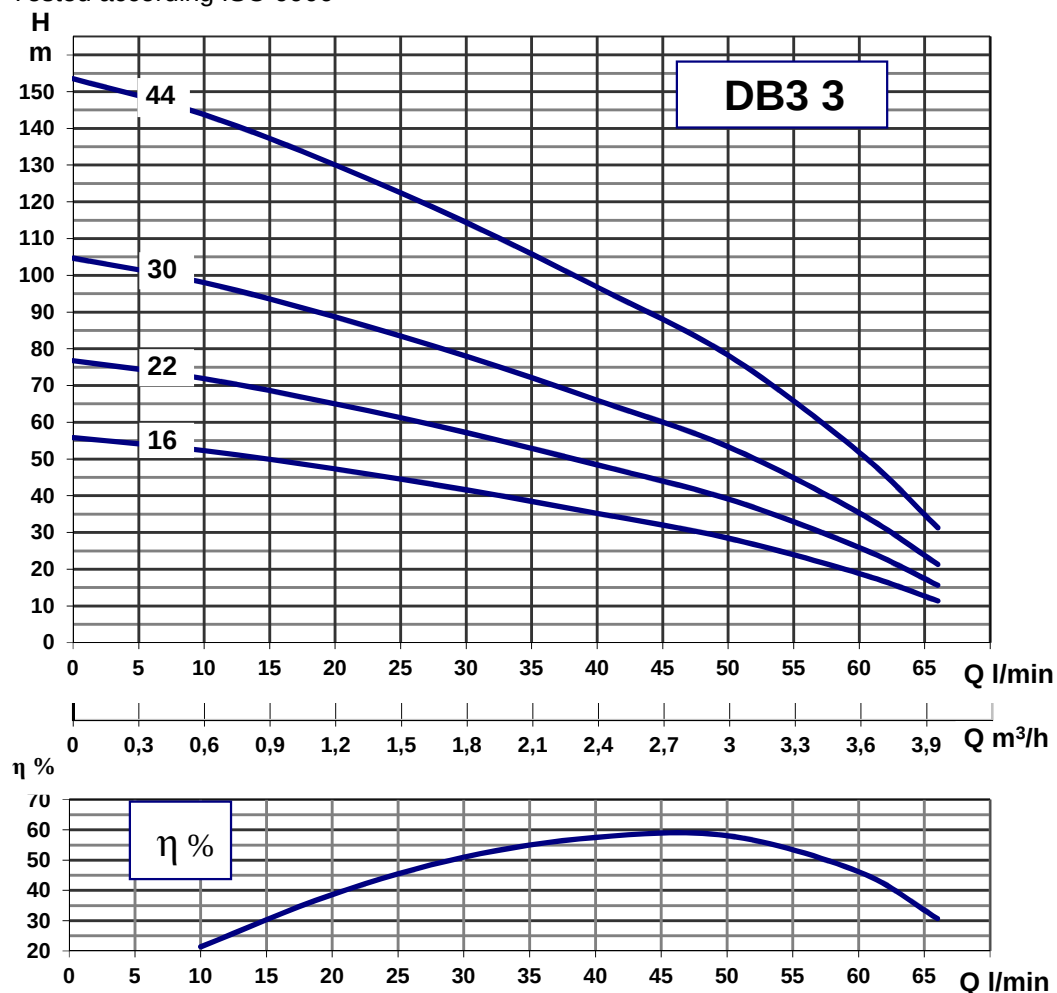

50 Hz - 2850 rpm

MODEL	50 Hz	MOTOR		CAPACITOR		Q - Flow								DIMENSIONS				
						m³/h	0	0,6	1,2	1,8	2,4	3	3,6					4
						l/min	0	10	20	30	40	50	60	66	A	B	C	DN
						H - Manometric height (m)												
BS3 3/16M	1~220/230	0,37	3,8	16	450	56	52	47	42	35	28	19	11	923	377	546	1" 1/4	
BS3 3/16T	3~220/230 3~380/415		3.5 2.0											923	377			
BS3 3/22M	1~220/230	0,55	4,5	20	450	77	72	65	57	48	39	26	16	1075	397	678	1" 1/4	
BS3 3/22T	3~220/230 3~380/415		3.7 2.1											1055	377			
BS3 3/30M	1~220/230	0,75	5,9	25	450	105	98	89	78	66	53	35	21	1270	416	854	1" 1/4	
BS3 3/30T	3~220/230 3~380/415		4.4 2.5											1251	397			
BS3 3/44T	3~220/230 3~380/415	1,1	5.6 3.2			154	144	130	114	97	78	52	31	1619	416	1203	1" 1/4	